




**POWER ARM  
75 SERIES**

**PA5675** - 5.6m (18' 4") reach  
**PA6475** - 6.4m (21') reach

<b>75 SERIES</b>		
<b>Advanced Controls</b>	<b>PA5675</b>	<b>PA6475</b>
Cable Control	—	—
Motion Mini	—	—
Motion	<input type="checkbox"/>	<input type="checkbox"/>
Evolution	<input type="checkbox"/>	<input type="checkbox"/>
Revolution Including Easy Drive System (EDS)	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Cable Control (CRC)	—	—
Two-way Rotor Engagement - Electric Control (ERC)*	■	■
<b>Mounting</b>		
Front 3-Point Mounting Including Stabiliser	—	—
Front DIN Plate Mounting	—	—
Rear 3-Point Mounting Including Stabiliser	■	■
Rear 3-Point to 4-Point Hitch Stabiliser Kit	<input type="checkbox"/>	<input type="checkbox"/>
Rear 3-Point to 5-Point Axle Mounting Kit**	<input type="checkbox"/>	<input type="checkbox"/>
Rear 5-Point Rigid Frame, Axle Mounting Kit**	<input type="checkbox"/>	<input type="checkbox"/>
<b>Armsets</b>		
Straight Armset	■	■
Midcut Armset	—	—
Telescopic Armset	—	—
Variable Forward Reach Armset (VFR)	<input type="checkbox"/>	<input type="checkbox"/>
Telescopic-Variable Forward Reach Armset (T-VFR)	—	—
Parallel Arm Geometry	■	■
<b>Hydraulics</b>		
Horsepower	70hp	70hp
System Type	Gear	Gear
Pump Type	Cast	Cast
Total Flow Rate l/min	160.0	160.0
Arm Circuit Flow Rate l/min	32.0	32.0
Attachment Circuit Flow Rate l/min	128.0	128.0
Oil Tank Capacity	200ltrs	200ltrs
Oil Cooler	■	■
Totally Independent Hydraulic System	■	■
<b>Hydraulic Upgrades</b>		
Angle Float Kit	■	■
Lift Float Kit	<input type="checkbox"/>	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>
EDS (only on REVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—
Additional Hydraulic Services	<input type="checkbox"/>	<input type="checkbox"/>
<b>Safety Equipment</b>		
External Debris Blower	<input type="checkbox"/>	<input type="checkbox"/>
Integrated Debris Blower	—	—
Road Lighting Kit	■	■
Warning Arrow Kit	<input type="checkbox"/>	<input type="checkbox"/>
Window Guards	—	—
Cab Protection Kit	■	■
Safety Breakaway	■	■
Power Slew	■	■
Cushioned Top Link	■	■
<b>Tractor Requirements</b>		
Minimum Tractor Weight	5,000kg	5,000kg
Minimum Tractor Horsepower	120hp	120hp
<b>Specification</b>		
Machine Weight #	1695kg	TBC
Left and Right-Hand Build Options	<input type="checkbox"/>	<input type="checkbox"/>

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

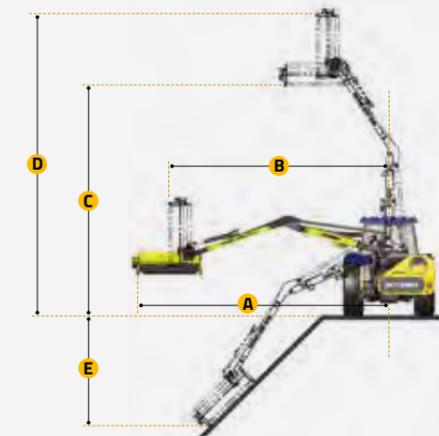

**REACH DIMENSIONS**

	<b>PA5675</b>	<b>PA6475</b>
<b>A</b>	5.6m / 18' 4"	6.5m / 21' 4"
<b>B</b>	5.1m / 16' 9"	5.9m / 19' 4"
<b>C</b>	5.2m / 17' 1"	5.7m / 18' 8"
<b>D</b>	6.7m / 22'	7.1m / 23' 4"
<b>E</b>	2.4m / 7' 10"	3.0m / 9' 10"

**POWER ARM FLAILHEADS**

	<b>PA5675</b>	<b>PA6475</b>
1.00m Supercut Flailhead - DD	—	—
1.20m Supercut Flailhead - DD	—	—
1.20m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Tuffcut Flailhead - DD	—	—
1.20m Twincut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Twincut Flailhead - DD	—	—
1.50m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Tuffcut Flailhead - DD	—	—
1.60m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
2.00m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>
2.00m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>
<b>Flailhead options</b>		
Flailhead Skid Kit	<input type="checkbox"/>	<input type="checkbox"/>
Cushioned Grass Mowing Roller	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Roller	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Front Hood	<input type="checkbox"/>	<input type="checkbox"/>

■ Standard Equipment □ Optional Equipment — Not available

A rugged heavy-duty series designed for full-time contractors, the 75 Series is precision-engineered from Domex Steel and features a radical new oil tank and cooling system for peak performance in all conditions.

Available in five different reach sizes from 5.6m to 8.0m and powered by high-performance 70hp hydraulics, the new series is available with a suite of advanced features including the REVOLUTION Control System, EDS, and the Tele-VFR armset.

- 5 Reach options from 5.6m to 8.0m
- 3 Advanced control options
- 4 Mounting options
- 2 Armset options
- 4 Floatation services
- 28 Attachment options






POWER ARM  
**75 SERIES**

**PA6575T** - 6.5m (21' 4") reach  
**PA7775T** - 7.7m (25' 3") reach  
**PA8075T** - 8.0m (26' 3") reach

<b>75 SERIES</b>			
<b>Advanced Controls</b>	<b>PA6575T</b>	<b>PA7775T</b>	<b>PA8075T</b>
Cable Control	—	—	—
Motion Mini	—	—	—
Motion	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Evolution	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Revolution Including Easy Drive System (EDS)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Two-way Rotor Engagement - Cable Control (CRC)	—	—	—
Two-way Rotor Engagement - Electric Control (ERC)*	■	■	■
<b>Mounting</b>			
Front 3-Point Mounting Including Stabiliser	—	—	—
Front DIN Plate Mounting	—	—	—
Rear 3-Point Mounting Including Stabiliser	■	—	—
Rear 3-Point to 4-Point Hitch Stabiliser Kit	<input type="checkbox"/>	—	—
Rear 3-Point to 5-Point Axle Mounting Kit**	<input type="checkbox"/>	—	—
Rear 5-Point Rigid Frame, Axle Mounting Kit**	<input type="checkbox"/>	■	■
<b>Armsets</b>			
Straight Armset	—	—	—
Midcut Armset	—	—	—
Telescopic Armset	■	■	■
Variable Forward Reach Armset (VFR)	—	—	—
Telescopic-Variable Forward Reach Armset (T-VFR)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Parallel Arm Geometry	■	■	■
<b>Hydraulics</b>			
Horsepower	70hp	70hp	70hp
System Type	Gear	Gear	Gear
Pump Type	Cast	Cast	Cast
Total Flow Rate l/min	160.0	160.0	160.0
Arm Circuit Flow Rate l/min	32.0	32.0	32.0
Attachment Circuit Flow Rate l/min	128.0	128.0	128.0
Oil Tank Capacity	200ltrs	200ltrs	200ltrs
Oil Cooler	■	■	■
Totally Independent Hydraulic System	■	■	■
<b>Hydraulic Upgrades</b>			
Angle Float Kit	■	■	■
Lift Float Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Advanced Float Kit (only on EVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
EDS (only on REVOLUTION controls)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PowerBoost (75 l/min Arm Circuit Flow Rate)	—	—	—
Additional Hydraulic Services	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>Safety Equipment</b>			
External Debris Blower	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Integrated Debris Blower	—	—	—
Road Lighting Kit	■	■	■
Warning Arrow Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Window Guards	—	—	—
Cab Protection Kit	■	■	■
Safety Breakaway	■	■	■
Power Slew	■	■	■
Cushioned Top Link	■	■	■
<b>Tractor Requirements</b>			
Minimum Tractor Weight	5,500kg	5,500kg	5,500kg
Minimum Tractor Horsepower	120hp	120hp	120hp
<b>Specification</b>			
Machine Weight #	TBC	1933kg	2291kg
Left and Right-Hand Build Options	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

\* Including SoftStart \*\* Excluding axle brackets & latches # Depending on specification, excluding attachment & oil

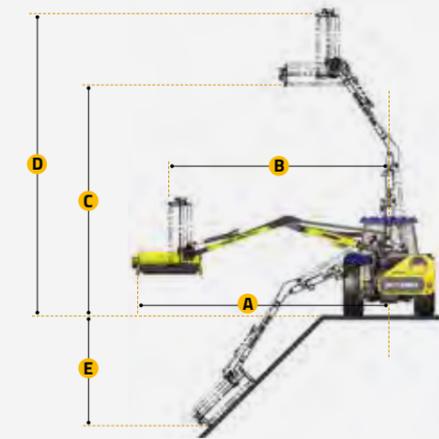

**REACH DIMENSIONS**

	<b>PA6575T</b>	<b>PA7775T</b>	<b>PA8075T</b>
<b>A</b>	6.6m / 21' 8"	7.75m / 25' 5"	8.0m / 26' 3"
<b>B</b>	6.0m / 19' 8"	7.15m / 23' 5"	7.4m / 24' 3"
<b>C</b>	5.9m / 19' 4"	7.03m / 23' 1"	7.4m / 24' 3"
<b>D</b>	7.4m / 24' 3"	8.52m / 27' 11"	8.8m / 28' 10"
<b>E</b>	3.1m / 10' 2"	3.94m / 12' 11"	4.1m / 13' 5"

**POWER ARM FLAILHEADS**

	<b>PA6575T</b>	<b>PA7775T</b>	<b>PA8075T</b>
1.00m Supercut Flailhead - DD	—	—	—
1.20m Supercut Flailhead - DD	—	—	—
1.20m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Tuffcut Flailhead - DD	—	—	—
1.20m Twincut Flailhead - DD	<input type="checkbox"/>	—	—
1.20m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.20m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Multicut Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Twincut Flailhead - DD	—	—	—
1.50m Omega Flailhead - DD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.50m Omega Flailhead - BD	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1.60m Multicut Flailhead - DD	—	—	—
1.60m Multicut Flailhead - BD	—	—	—
1.60m Tuffcut Flailhead - DD	—	—	—
1.60m Omega Flailhead - DD	—	—	—
1.60m Omega Flailhead - BD	—	—	—
2.00m Multicut Flailhead - DD	—	—	—
2.00m Multicut Flailhead - BD	—	—	—
<b>Flailhead options</b>			
Flailhead Skid Kit	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Cushioned Grass Mowing Roller	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Roller	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Hydraulic Front Hood	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

■ Standard Equipment □ Optional Equipment — Not available

A rugged heavy-duty series designed for full-time contractors, the 75 Series is precision-engineered from Domex Steel and features a radical new oil tank and cooling system for peak performance in all conditions.

Available in five different reach sizes from 5.6m to 8.0m and powered by high-performance 70hp hydraulics, the new series is available with a suite of advanced features including the REVOLUTION Control System, EDS, and the Tele-VFR armset.

- 5 Reach options from 5.6m to 8.0m
- 3 Advanced control options
- 4 Mounting options
- 2 Armset options
- 4 Floatation services
- 28 Attachment options

